


MIL-DTL-5015 Series III Crimp Rear Release



Apollo Aerospace Components is a franchised distributor of selected mil-specification connectors for leading QPL manufacturers. We offer a comprehensive inventory of backshells, contacts and connector accessories.

A family of heavy duty circular connectors based on the MIL-DTL-5015 form factor. They are designed for use in demanding and rugged applications in both the military and commercial sectors and used primarily for their ease of engagement and disengagement, with ability to house different types of contacts.

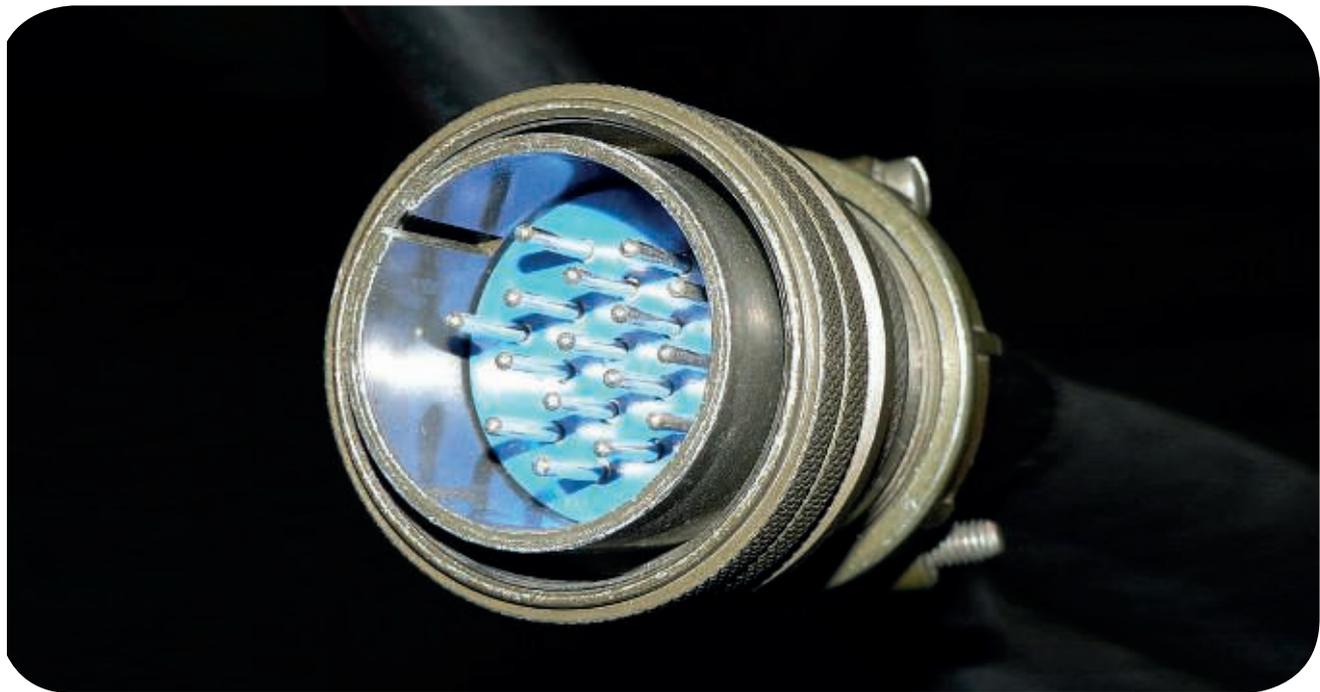

Product Features

- Crimp type contacts, rear release from insulator.
- Field proven medium to heavy weight cylindrical design.
- Threaded coupling (bayonet variants available).
- Single key/keyway shell polarisation.
- Signal, power, co-ax and thermocouple contacts.

Product Benefits

- Very durable proven design.
- Circuit adaptable with ability to mix signal and power.
- Vibration, moisture, pressure and temperature resilient.
- Environmental resistant.
- Broad range of proven accessories.
- Reduces possible contact assembly damage to front of insulator.



Apollo Aerospace Components
The Clock House, Gaters Mill,
Mansbridge Road,
Southampton, SO18 3HW

T: +44 (0) 1489 861378
E: electrical-sales@apollo-aerospace.com

www.apollo-aerospace.com

MIL-DTL-5015 Series III Crimp Rear Release



Product technical description

Signal or power connector, quick coupling via thread with 1 to 85 contacts in approved insert arrangements, additional options up to 163 contacts in over 300 arrangements. With a variety of contact termination options together with various body styles and platings they suit a broad range of applications requiring a cost effective heavier duty interconnect. They are used extensively in harsh environment applications within the military, aerospace and commercial market sectors. (Bayonet versions also available)

- Crimp terminated contacts assembled and released from rear of insulator.
- 500 mating cycles.
- 5 polarisation options.
- 30 PSI sealing hermetic configurations.
- High power contacts size 8 to 0. 1000-7000 V rms.
- Signal, power, co-ax and thermocouple variants.
- -55 to +200 degC operating temps.
- Threaded coupling (bayonet options available).

How to order

MIL-DTL-5015 Series III Crimp Rear Release (example)

MS	3450	K	S	28	21	P	Y
Military Prefix	Shell Style	Service Class	Shell Material	Shell Size	Contact Arrangement	Contact Style	Polarising Position

ORDERING INFORMATION

Shell Style	MS3450 - Wall mount receptacle MS3451 - In-line receptacle MS3452 - Box mount receptacle MS3454 - Jam nut receptacle MS3456 - Straight plug NS3459 - Straight plug, self-locking coupling nut					
Service Class	Class	Code	Material	Finish	Application	Temp
	K	T	Carbon steel	Electroless nickel	Firewall	-55 to +175 degC
	KS	S	Stainless	Passivated	Firewall	-55 to +175 degC
	KT	T	Carbon steel	Cadmium olive drab. 96 hour	Firewall	-55 to +175 degC
	L	Blank	Aluminium	Electroless nickel	High temperature	-55 to +200 degC
	LS	S	Stainless	Passivated	High temperature	-55 to +200 degC
	U	Blank	Aluminium	Electroless nickel	High temperature	-55 to +200 degC
	US	S	Stainless	Passivated	High temperature	-55 to +200 degC
	W	Blank	Aluminium	Cadmium olive drab. 96 hour	General purpose	-55 to +175 degC
Shell Size	Refer to MIL-DTL-5015 specification or refer to product range on website					
Contact Arrangement	Refer to MIL-DTL-5015 specification or refer to product range on website					
Contact Style	A - Pin inserts, less contacts B - Socket insert, less contacts P - Pin contacts S - Socket contacts					
Polarising Position	BLANK (Normal), W, X, Y, Z					